

# Hynds Concrete Wheel Stops



Technical Guide SP1.3

Hynds Concrete Wheel Stops are used to keep vehicles within designated parking areas and protect surrounding property.



03.15 | SURFACE | SP1.3 | HYNDS CONCRETE WHEEL STOPS

## Applications

Provides low impact resistance when parking slow moving cars and light commercial vehicles

Suitable for outdoor and indoor car park areas

## Product Attributes

Precast concrete for durability

Will not rust or rot

Special units can be manufactured for greater impact requirements

## Approvals/Standards

NZS3101 Design of Concrete Structures

## Quality

ISO 9001:2008 Quality Management Standard

*The go to organisation for civil  
and rural water product solutions*

**HYNDS**

Hynds Concrete Wheel Stops are used to keep vehicles within designated parking areas and protect surrounding property.



### Installation

There are three options for fixing of the Hynds Wheel Stops:


- Galvanised pins 12mmØ or 20mmØ x 350mm
- Coach bolts
- Epoxy

For installation of wheel stops on a concrete surface, it may be necessary to provide a mortar, grout or epoxy bedding layer to take up dimensional tolerances between the in-situ and precast concrete.


**TABLE 1 Concrete Wheel Stops Range**

| Product Code | Description                               | Weight (kg) |
|--------------|---|-------------|
| CS4125       | Wheel Stop 1820 x 125mm                   | 64          |
| CS4125N      | Wheel Stop 1815 x 130mm                   | 64          |
| CS4126MC     | Wheel Stop 1870 x 100mm                   | 64          |
| CSP12MS      | Wheel Stop Pin Mild Steel 12 x 350mm      | —           |
| CSPMS        | Wheel Stop Pin Mild Steel 20 x 350mm      | —           |
| CSPSS        | Wheel Stop Pin Stainless Steel 20 x 350mm | —           |


**Note:** Please check availability & freight with your local branch.

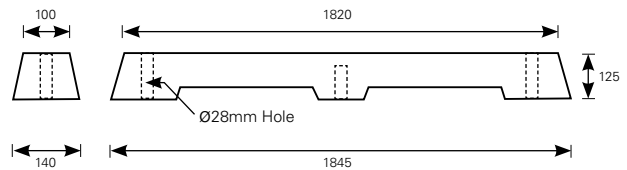

**FIG. 1** CS4125 – Available from Hamilton to Wellington

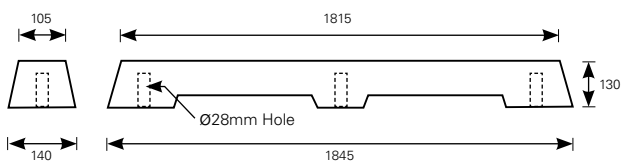

**FIG. 2** CS4125N – Available from Hamilton North

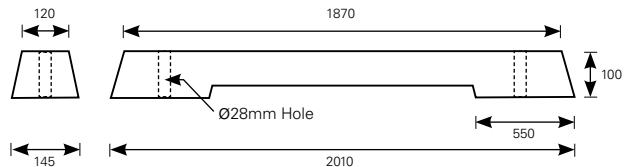

**FIG. 3** CS4126MC – Available throughout the South Island

**Branches Nationwide** Support Office & Technical Services 09 274 0316

**Disclaimer:** While every effort has been made to ensure that the information in this document is correct and accurate, users of Hynds product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hynds unless expressly stated in any sale and purchase agreement entered into between Hynds and the user.